

BOX SUSPENDED

06-Sep.-2018

2.0 | 3.0 LED

LED 6W | 220-240VAC | 50-60Hz | COB 3-step | incl. PS | phase-cut dim

CE IP20 0,3m 36°

2.0

200mm

white texture
aluminium brushed
copper
black texture

207164W_
207164L_
207164P_
207164B_

3.0

300mm

white texture
aluminium brushed
copper
black texture

207264W_
207264L_
207264P_
207264B_

LIGHT COLOUR

2700K | >90CRI | 420lm

3

3000K | >90CRI | 440lm

5

1800-2850K | >95CRI | 360lm

9

2.0 | 3.0 PAR16

max. 35W | GU10 | 100-240VAC | 50-60Hz

CE IP20 0,9m

2.0

200mm

white texture
aluminium brushed
copper
black texture

207120W0
207120L0
207120P0
207120B0

3.0

300mm

white texture
aluminium brushed
copper
black texture



207220W0
207220L0
207220P0
207220B0

OPTIONAL


for PAR16 lamps see our catalogue

* For this product, the cable with a plug that comes with the LED module is not needed. Please remove it first and then use the LED module.

not needed (this notification refers to the a part of the cable)

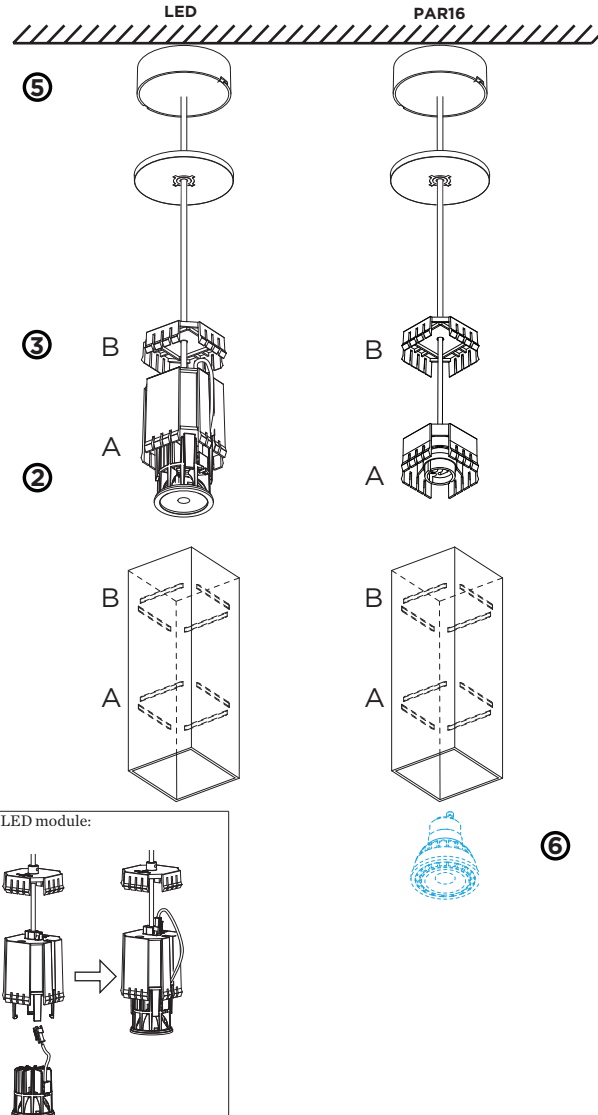

DIMENSIONS




MOUNTING INSTRUCTION

- ONLY FOR LED: mount the LED module into the suspension set.
- Insert part A until it clicks in the lower part of the cover
- Insert part B until it clicks in the higher part of the cover
- POWER CONNECTION**

Connect wiring to the power supply (for LED) or to terminal block (for PAR16)

PARALLEL CONNECTION



- Mount the ceiling base on the ceiling
(You have to turn the cover counterclockwise a quarter in order to loosen it from the ceiling base and mounting back on is by turning clockwise.)
- ONLY FOR PAR16
Insert the lamp