




PROJECT

TYPE

NOTES

QUANTITY

DATE

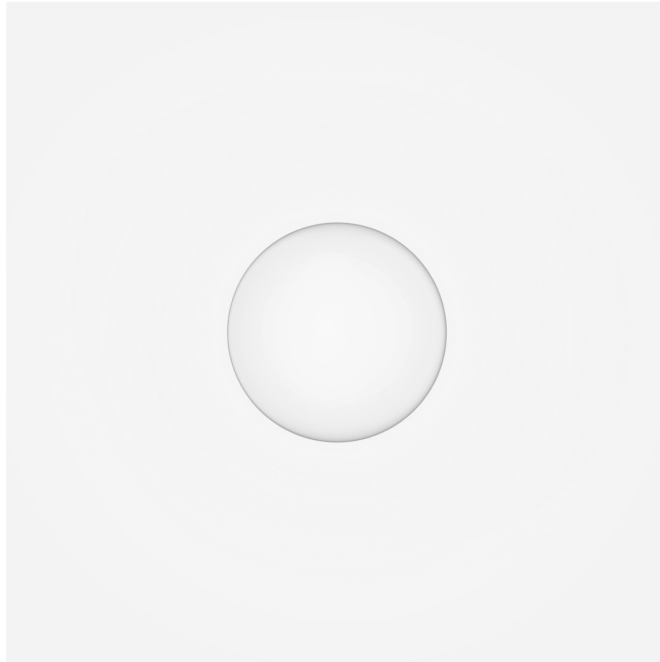

IP44



Round light sphere with diffuse light; for mounting on the mirror (2-7 mm) using a clip; white opal glass; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 3000 K; ≤ 2 SDCM (initial MacAdam); CRI ≥ 95 ; degree of protection IP44; Class 1; driver included; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by end-user;

LUMINAIRE

Wall
Surface
White Opal Glass
No matching RAL
IP44
Interior
550 lm

LED Module

3000 K
CRI ≥ 95
L80 / 60000 h
 ≤ 2 SDCM (initial MacAdam)
548 lm
91 lm/W^a

Optical

Opal
CIE flux code: 24 49 75 51 100


Electrical

phase-cut dim
220 - 240 V
system 8.3 W
Class I

Physical

length 130 mm
width 86 mm
height 130 mm
0.46 kg

^a Without electrical and optical losses




Maintenance Factor

Operating Time [h]	10.000	20.000	30.000	40.000	50.000
LLMF	0.97	0.93	0.9	0.86	0.82
LSF	1	1	1	1	1

MF	LMF × RSMF × LLMF × LSF	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Factor

^aAccording to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.