




PROJECT _____

TYPE _____


NOTES _____

QUANTITY _____

DATE _____



Cylindrical ceiling surface mounted downlight made from die-cast aluminium; adjustable; surface Black Matt + Champagne; powder coated; matt texture + wet painted; smooth semi glossy; RAL 9011; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 2700 K; ≤ 2 SDCM (initial MacAdam); CRI ≥ 90 ; 220 - 240 V; beam angle 15°; 355° rotatable and 25° tiltable; degree of protection IP20; Class I; driver included; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by end-user;



LUMINAIRE

Ceiling
Surface
tilt max 25 °
rotation 355 °
Black Matt + Champagne
RAL 9011 ^a
IP20
Interior
560 lm

LED Module

2700 K
CRI ≥ 90
L80 / 50000h
≤ 2 SDCM (initial MacAdam)
650 lm
109 lm/W ^b

Optical

Narrow
beam angle 15°
CIE flux code: 98 100 100 100 100

Electrical

phase-cut dim
220 - 240 V
system 8.3 W
Class I
Standard


Physical

diameter 82 mm
height 130 mm
0.42 kg

datasheet.quicksum.material

Aluminium

^a Colour may deviate slightly due to production conditions
^b Without electrical and optical losses

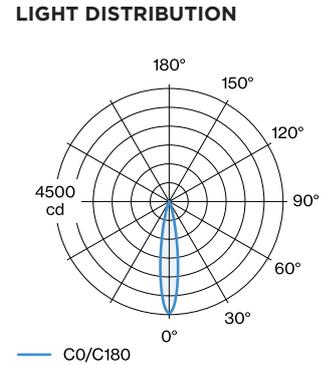



CONE DIAGRAM

narrow 18°

h (m)	E0° (lx)	ø (m)
1	4440	0.31
2	1110	0.62
3	490	0.93
4	280	1.25
5	180	1.56

Maintenance Factor

Operating Time [h]	10.000	20.000	30.000	40.000	50.000
LLMF	0.98	0.95	0.93	0.9	0.88
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Factor

^aAccording to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.