

TAPE 8.0

722474D5

GENERAL

Floor , Standing
Grey Texture
RAL 9007 ^a
IP65
Exterior
Output: 425 lm
CIE flux code: 53 89 99 98 100

LED

3000 K
CRI ≥ 90
L80 / 60000 h
3 SDCM

ELECTRICAL

phase-cut dim
220 - 240 V
Total connected power 7.8 W
Class 1

PHYSICAL

Length 180 mm
Width 60 mm
Height 800 mm
3.1 kg

^a Color may deviate slightly due to production conditions.


Project _____

Type _____


Notes _____

Quantity _____


Date _____



Floor surface mounted luminaire made from die-cast aluminium; surface Grey Texture; powder coated; matt texture; RAL 9007; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 3000 K; binning initial MacAdam ≤ 3 SDCM; CRI ≥ 90; 220 - 240 V; degree of protection IP65; PC1; optional ground spike available; driver included; light source not replaceable; control gear replaceable by end-user;

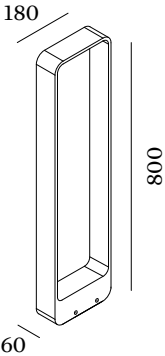

LIGHT DISTRIBUTION



TAPE

8.0

722474D5

Maintenance Factors

Operating Time [h]	10 000	20 000	30 000	40 000	50 000
LLMF	0.98	0.98	0.98	0.97	0.97
LSF	1	1	1	1	1

MF	LMF × RSMF × LLMF × LSF		RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor		LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor		LSF	Lamp Survival Faktor

^a According to “CIE 97, Maintenance of indoor electric lighting systems”, 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

MOUNTING

Ground Spike

TYPE	L · W · H (MM)	ORDERCODE
TAPE	62-115-357	9 0 0 1 3 1 0 2