





PROJECT _____

TYPE _____


NOTES _____

QUANTITY _____

DATE _____

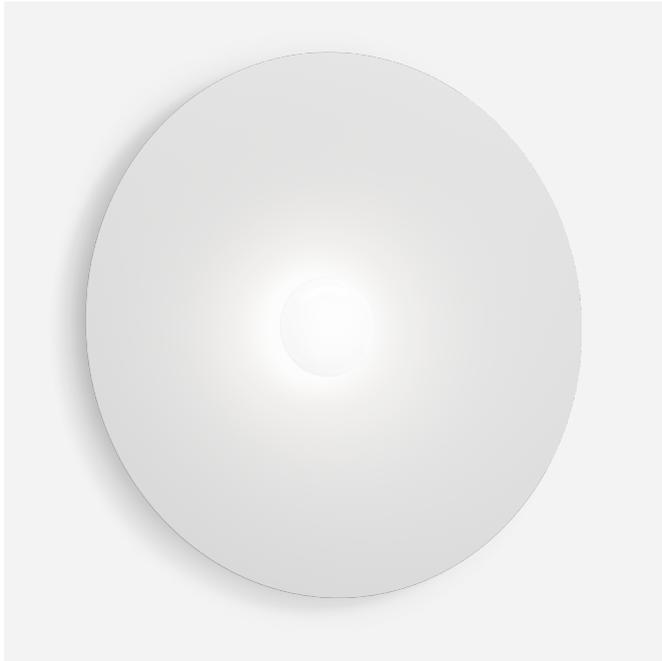

Round shape wall surface mounted luminaire with diffuse light; aluminium base in White Matt wet painted; matt texture; aluminium shade; surface White Matt wet painted; matt texture; RAL 9010; white opal glass handblown; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 3000 K; ≤ 2 SDCM (initial MacAdam); CRI ≥ 90 ; CRI (Colour Rendering Index) ≥ 90 ; degree of protection IP20; Class I; driver included; light source replaceable by Wever & Ducré or by a professional with explicit authorization; control gear replaceable by end-user;

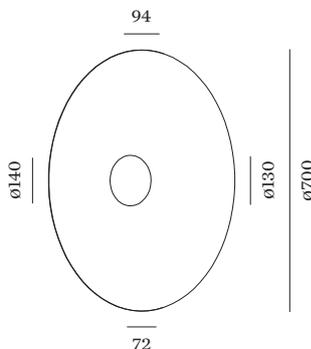

LUMINAIRE

Wall
Surface
White Matt
RAL 9010 ^a
IP20
Interior
600 lm

LED Module

3000 K
CRI ≥ 90
L80 / 50000 h
≤ 2 SDCM (initial MacAdam)
650 lm
80 lm/W ^b

Optical

Opal
CIE flux code: 18 43 71 50 100

Electrical

phase-cut dim
220 - 240 V
system 10.1 W
Class I
Standard

Physical


diameter 700 mm
height 94 mm
2.09 kg

datasheet.quicksum.material

Aluminium

^a Colour may deviate slightly due to production conditions
^b Without electrical and optical losses

LIGHT DISTRIBUTION

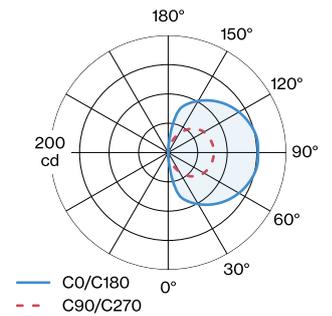

[181684W5] The technical data represent rated values for an ambient temperature of 25°C. The data values for the luminous flux are initially subject to a tolerance of +/- 10%, those for the electrical connected load are initially subject to a tolerance of +/- 10%, and those for the colour temperature are initially subject to a tolerance of +/- 150 K. No liability is assumed for typographical or printing errors. The general terms and conditions of Wever & Ducré BV apply.



Maintenance Factor

Operating Time [h]	10.000	20.000	30.000	40.000	50.000
LLMF	0.96	0.92	0.88	0.85	0.81
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$	RSMF ^a	Room Surface Maintenance Factor
MF	Maintenance Factor	LLMF	Lamp Lumens Maintenance Factor
LMF ^a	Luminaire Maintenance Factor	LSF	Lamp Survival Factor

^aAccording to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.