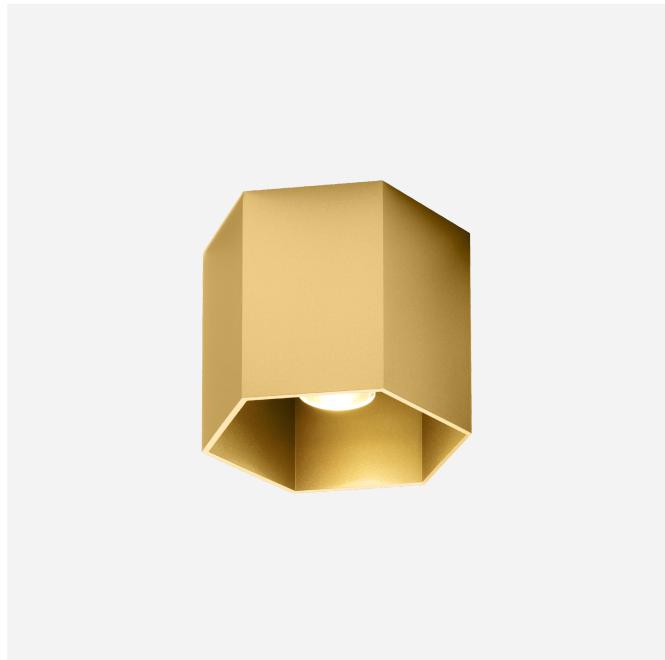




PROJECT
TYPE
NOTES
QUANTITY
DATE


Hexagonal ceiling surface mounted downlight made from die-cast aluminium; surface Gold; wet painted; brushed; No matching RAL; with COB (Chip on Board) technology for maximum efficiency; phase-cut dim; light colour 3000 K; ≤ 3 SDCM (initial MacAdam); CRI ≥ 90 ; 220 - 240 V; degree of protection IP20; Class 1; UGR ≤ 13 ; VDU compatible workplace luminaire according to DIN EN 12464-1; luminance above $65^\circ \leq 1500 \text{ cd/m}^2$; optional single inner cover available; light source replaceable by Wever & Ducré or by a professional with explicit authorization;

LUMINAIRE

Ceiling
Surface
Gold
No matching RAL
IP20
Interior
610 lm

LIGHT DISTRIBUTION

LED Module

3000 K
CRI ≥ 90
L70 / 50000h
 ≤ 3 SDCM (initial MacAdam)
760 lm
94 lm/W ^a

Optical

Medium (standard)
beam angle 21°
CIE flux code: 93 99 100 100
100


Electrical

phase-cut dim
220 - 240 V
system 8.1 W
Class I

Physical

diameter 127 mm
height 100 mm
0.72 kg

^a Without electrical and optical losses




Maintenance Factor

Operating Time [h]	10.000	20.000	30.000	40.000	50.000
LLMF	0	0	0	0	0
LSF	1	1	1	1	1

MF	$LMF \times RSMF \times LLMF \times LSF$
MF	Maintenance Factor
LMFa	Luminaire Maintenance Factor

RSMFa	Room Surface Maintenance Factor
LLMF	Lamp Lumens Maintenance Factor
LSF	Lamp Survival Factor

^aAccording to "CIE 97, Maintenance of indoor electric lighting systems", 2005, ISBN 3-900-734-34-8. The values must be determined by the planner.

OPTICAL ACCESSORIES
Single Inner Cover

Type	Colour	Voltage	L·W·H (MM)	Item number
HEXO max. 10W	Black	77.4-67-54		911031B1
HEXO max. 10W	Gold	77.4-67-54		911031G1
HEXO max. 10W	White	77.4-67-54		911031W1